


ENDURO-FLEX TURBO™

Increase your productivity with the ENDURO-FLEX TURBOTM and its unique grit 36/60 ceramic grain blend that removes material quickly and leaves a paint-ready finish. The patented TurbofanTM design minimizes heat transfer to the surface which increases the disc life. Compatible with both steel and stainless steel, the high performance ENDURO-FLEX TURBOTM helps you work better and faster thanks to the fastest removal rate in the industry.




Always use with flange 30-B 057.

TYPE	27				F 5	teel Inox.
Dia.	Arbor	Order No.	Grade	Max. RPM	Std. Pkg.	Std. Ctn.
4 1/2"	7/8"	06-A 462	36/60	13,300	10	40
5"	7/8"	06-A 512	36/60	12,200	10	40
7"	7⁄8"	06-A 712	36/60	8,600	10	40

Always use with flange 30-B 057.

NEW

With a higher ergonomic angle of attack, the type 29 allows for a higher removal rate best suited for heavy-duty applications such as blending contours, edges and corners.

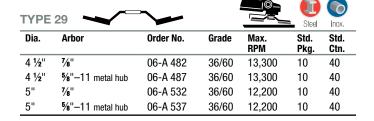

FOR MORE INFORMATION, TO SCHEDULE A FREE DEMO OR TO ORDER:

United States:

Phone: (800) 522-0321 | Fax (866) 274-4435

Email: OrderDesk.US@walter.com

Canada:

Phone: (888) 592-5837 | Fax (866) 581-1121

Email: csr@walter.com







- Fastest removal rate in the industry
- ▶ Patented TurbofanTM cooling keeps the workpiece cooler for longer disc life
- ∨ Vibration-free and comfortable grinding

PRO TIP: Achieve a paint-ready finish in one easy step. The ENDURO-FLEX TURBO™ removes material quickly (like a 36 grit), but leaves a finer 60 grit paint-ready finish, saving you a valuable step in the finishing process.

Available at :

Walter Surface Technologies Inc.© 2021 All Rights Reserved. Walter Surface Technologies and Bio-Circle logos are trademarks or registered trademarks of Walter Surface Technologies Inc. Other company, product or service names may be trademarks or service marks of Walter Surface Technologies or others. 98-E 104 (11-21)